



- DNV 2.7-1
- EN12079
- Cargo securing points inside
- Available fully galvanized
- Flemish splice sling option

Our baskets are designed and built to DNV 2.7-1 / EN12079 standards capable of handling the dynamic loads inflicted on them by lifting operations between moving vessels in the harshest of environments.

These full 8' wide baskets provide full truck transportation width and are capable of being stacked 2 high while still being within legal height. These come with the options of either tie down rings inside or ratchet winches for webbing straps .

Structurally robust to endure the rigors of long term offshore use. Includes tag line D-rings on all four sides for easy orientation. Empty lift pockets allow for loading and side shift on smaller forklifts.

Weights and dimensions in both metric and standard are displayed on the outside of the basket.

CONTACT INFORMATION


Sales@simmondsequipment.com
TEL- +1 877 271 7466
www.simmondsequipment.com

16' x 8' Basket

SOCIAL NETWORKING



Additional Benefits

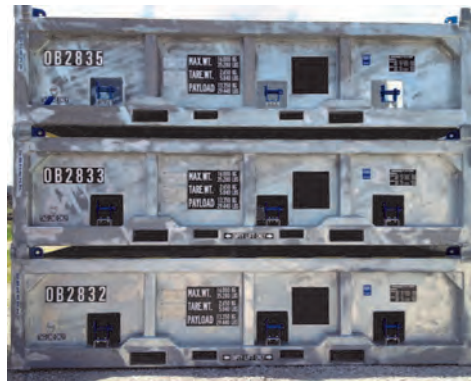

Headquarters

158 N Tunnel Road
Belle Chasse,
Louisiana 70037

+1 (504) 394-7466

Houston Location

12235 FM 529
Houston,
Texas 77041

TEL- +1 877 271 7466

Baskets can be stacked empty for efficient use of client yard space. Weights and payloads below may change slightly based on whether the units are painted, galvanized or both

Container Dimensions

Classification		Dimension	
External	Length	4875 mm	16'
	Width	2498 mm	8' - 2 11/32"
	Height	1280 mm	4' - 2 25/64"
Internal	Length	4505 mm	14' - 9 23/64"
	Width	2228 mm	7' - 3 45/64"
	Height	938 mm	3' - 59/64"
Tare Weight (+/-2%)		2600 KGS	5730 LBS
Max. Gross Weight		16000 KGS	35280 LBS
Max. Payload		13400 KGS	29550 LBS